


WAREG® FLOW REGULATOR

WAREG® FLOW REGULATOR

The WaReg flow regulator has been designed to regulate stormwater during heavy rainfall, redirecting the excess flow to prevent flooding of our communities. We know that we will be seeing increased precipitation in the future. WaReg flow regulator is designed to be adaptable post-installation which helps future proof stormwater systems build today - but designed for tomorrow.

Materials

Bracket	EN 1.4404
Chamber	PE
Fasteners mtrl.	EN 1.4404
Float	PE
Flow Cap	EN 1.4404
Rubber joint	EPDM
Spindle	EN 1.4462
Spindle Nut	CuSn12

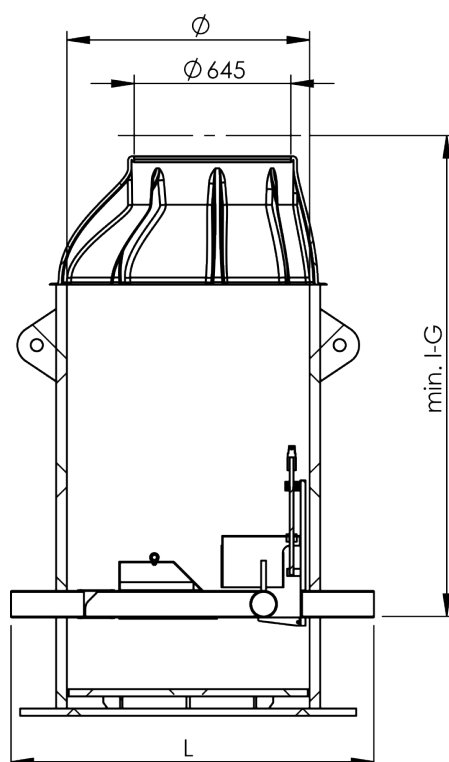



Product Data

Name	D [mm]	L [mm]	CØ [mm]	Weight [kg]	min. I-G [mm]	Pipe connection	Max. Flow Volume [l/s]	Min. Flow Volume [l/s]
WR75-30	75	1460	1000	235	1230	75 PE	5	2
WR110-30	110	1480	1000	239	1250	110 PE	13	4
WR160-30	160	1500	1000	241	1270	160 PE	22	13
WR200-30	200	2070	1200	318	1840	200 PE	45	22
WR250-30	250	1820	1400	389	1590	250 PE	70	35
WR315-30	315	2130	1800	635	1900	315 PE	110	55
WR400-30	400	2320	1400	735	1900	400 PE	200	90