

WASTOP® INLINE CHECK VALVE

WaStop Flange Outlet



The WaStop check valve installs in stormwater systems, providing immediate protection against flooding and backflow. Its unique, simple, and effective design also prevents unwanted odour and pest intrusion. This model features a flange for bolting onto head walls, ensuring secure and fast installation.

Product Info

Flange bolt pattern	wapro
Watertightness	EN 13564

Materials

Fasteners mtrl.	EN 1.4404
Valve Body	EN 1.4404, EN 1.4301

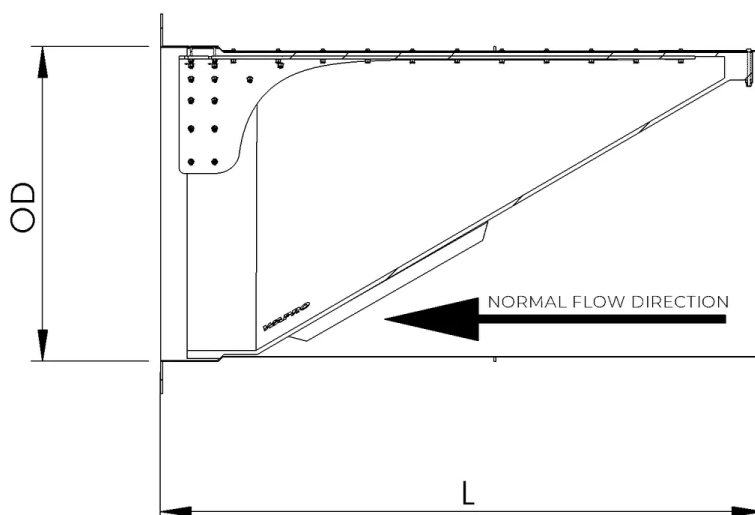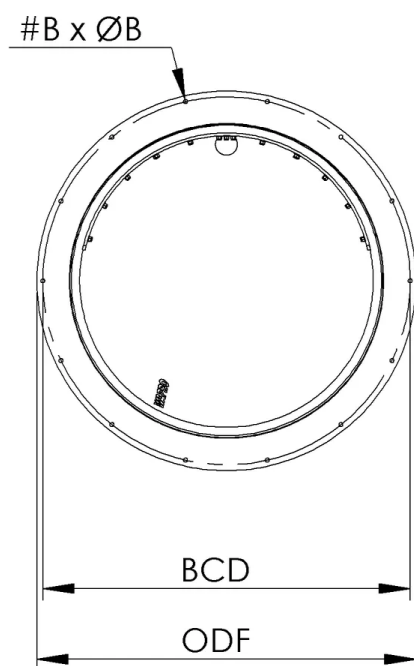



Product Data

Name	#B [-]	D [mm]	L [mm]	OD [mm]	ØB [mm]	BCD [mm]	Weight [kg]	Max. Flow Volume [l/s]	Max. ID Host Pipe [mm]	Min. ID Host Pipe [mm]	Max. Flow Velocity [m/s]
WS97-FL	6	96	210	96	9	210	1.5	16	106	98	2
WS101-FL	6	100	215	100	9	210	1.5	20	111	101	2
WS116-FL	8	115	235	116	9	225	1.8	26	126	117	2
WS146-FL	8	144.5	300	144.5	9	250	3	36	159	146	2
WS183-FL	8	181	385	181	9	300	5.2	64	200	182	2
WS193-FL	8	190.5	395	190.5	9	300	6.1	64	209	192	2
WS215-FL	8	215	450	215	9	325	6.4	80	233	216	2
WS230-FL	8	230	480	230	9	350	8.1	100	248	232	2
WS240-FL	8	240	495	240	9	350	8.9	100	258	242	2
WS265-FL	8	265	495	265	9	400	10	115	283	267	2
WS283-FL	8	283	600	303	10.5	400	11	125	301	285	2
WS290-FL	8	290	600	290	9	400	11	198	308	292	3
WS340-FL	12	340	700	340	9	460	18	290	360	344	3
WS370-FL	12	370	730	370	9	490	20	378	390	374	3
WS390-FL	12	390	750	390	9	510	22	378	411	393	3
WS440-FL	12	443	840	443	13	580	31	478	464	446	3
WS490-FL	12	490	900	490	13	630	37	786	511	493	4
WS515-FL	12	515	1000	515	14	630	41.2	833	536	518	4
WS590-FL	12	587	1140	587	13	720	54	1132	613	590	4
WS690-FL	12	687	1300	687	13	830	76	1540	710	692	4
WS750-FL	12	750	1400	750	13	880	92	1768	767	755	4
WS790-FL	6	790	1500	790	13	920	102	2012	807	795	4
WS885-FL	12	885	1700	885	13	1040	125	2546	912	890	4
WS985-FL	14	985	1800	985	17	1140	150	3142	1012	990	4
WS1040-FL	16	1040	2000	1040	17	1245	240	3464	1070	1048	4
WS1185-FL	14	1185	2250	1185	17	1380	390	5654	1230	1193	5
WS1335-FL	14	1335	2560	1335	17	1560	560	7000	1380	1343	5
WS1385-FL	14	1385	2600	1385	17	1560	560	7698	1430	1393	5
WS1485-FL	14	1485	2800	1485	17	1710	580	8836	1530	1493	5
WS1585-FL	18	1585	3000	1585	19	1840	700	10054	1630	1593	5

Name	#B [-]	D [mm]	L [mm]	OD [mm]	ØB [mm]	BCD [mm]	Weight [kg]	Max. Flow Volume [l/ s]	Max. ID Host Pipe [mm]	Min. ID Host Pipe [mm]	Max. Flow Velocity [m/ s]
WS1785-FL	19	1785	3100	1785	19	2040	920	12774	1830	1793	5
WS1980-FL	24	1980	3500	1980	21	2240	1310	15095	2040	1988	5