


WASTOP® INLINE CHECK VALVE

WaStop 215 Short

Model Name	WS215-SH
Nominal Diameter	DN 200
Fasteners mtrl.	EN 1.4404
Gasket	EPDM
Weight [kg]	4
Max. ID Host Pipe [mm]	233
Min. ID Host Pipe [mm]	216
Max. Flow Velocity [m/s]	2
Max. Flow Volume [I/s]	80

Product Variants

Art. No	WS215-S3-316-SH	WS215-S4-316-SH	WS215-C-316-SH
Membrane mtrl.	EPDM	Polyurethane	EPDM
Valve Body	EN 1.4404	EN 1.4404	EN 1.4404
Max. Back Pressure [mH ₂ O]	3	3	3
Horizontal Opening [mmH ₂ O]	190	340	210
Horizontal Closing [mmH ₂ O]	115	160	110
Submerged Opening [mmH ₂ O]	160	320	170
Submerged Closing [mmH ₂ O]	45	65	35
Vertical Opening [mmH ₂ O]	255	355	295
Vertical Closing [mmH ₂ O]	185	210	180
CO ₂ Equivalent (CO ₂ e) [kg CO ₂ e/unit]	35.8	-	-
Weight [kg]	5.3	-	-

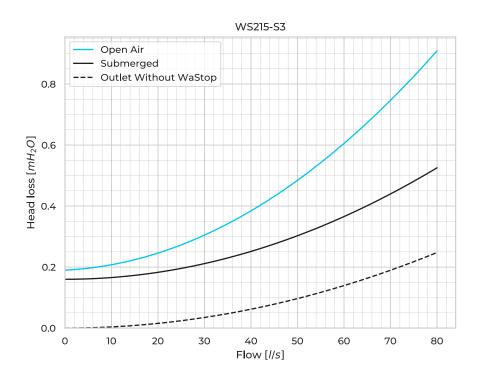

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved